


MODEL : SB-S



Dimension

MODEL - SB-S

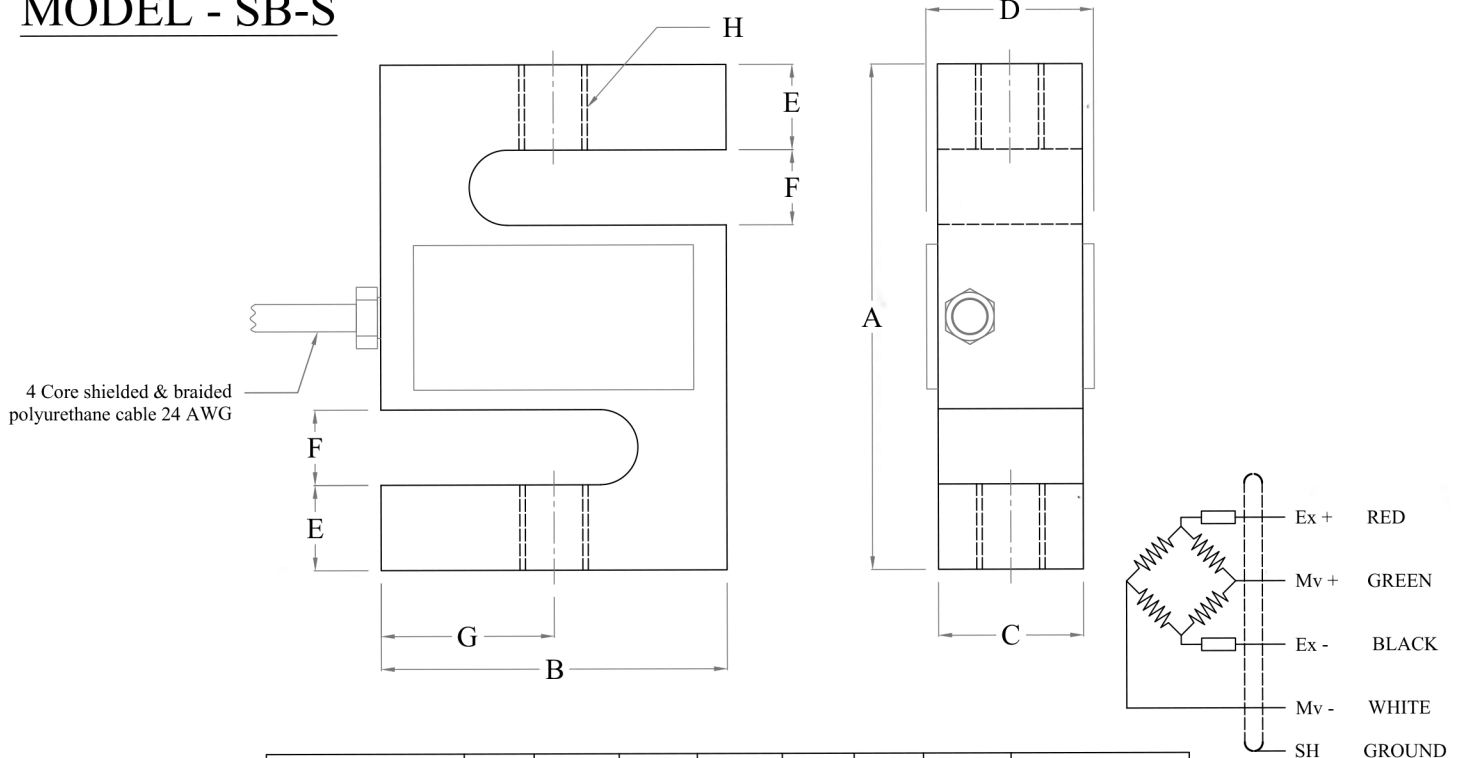

Cap. kgf	A	B	C	D	E	F	G	H
10 - 25	74	50.6	12.5	15.5	12	11	25.3	M8x1.25
50 - 150	74	50.6	12.5	15.5	12	11	25.3	M10x1.25
200 - 900	74	50.6	18.5	21.5	12	11	25.3	M12x1.25
1000 - 2500	74	50.6	25.2	29	14	11	25.3	M12x1.25

All Dimensions are in mm.

MODEL : SB-S

Performance Data		Features
Capacity Range (in Kg)	10/11/25/50/100/150/200/250/350/500/750/900	<ul style="list-style-type: none"> ★ Low Profile Design ★ Low Deflection & Creep ★ Excellent Overload Capability ★ Standardised output for Multi-Transducer Application
Capacity Range (in tf)	1/1.1/1.5/1.8/2/2.2/2.5	
Nominal Sensitivity (mv/V)	3±0.25%	
Zero Signal Tolerance	0 ± 2%	
Input Resistance	350±5Ω	
Output Resistance	350±3Ω	
Recommended Excitation Voltage	10 VDC	
Maximum Excitation Voltage	15 VDC	
Linearity Deviation (as % of Full Scale)	< ± 0.020	
Repeatability (as % of Full Scale)	< ± 0.020	
Hysteresis (as % of Full Scale)	< ± 0.020	<div style="background-color: #333; color: white; padding: 5px; text-align: center;">Optional</div> <ul style="list-style-type: none"> ★ Explosion proof Version Suitable for Group I,IIA,IIB,IIC & meet Temperature Class T4
Creep (as % of Full Scale) in 30 min	< ± 0.020	
Effect of Temperature on Zero (% / °C)	± 0.002	
Effect of Temperature on Span (% / °C of Load)	± 0.001	
Compensated Temperature Range	-10 to + 40°C	
Operating Temperature Range	-20 to +70°C	
Combined Error (as % Full Scale)	< ± 0.020 max	
Isolation Resistance (@ 50 VDC)	> 1000 MΩ	
Max. Limit Force (as % of Full Scale)	150	
Breaking Force (as % of Full Scale)	300	
Lateral Load Limit (as % of Full Scale)		<div style="background-color: #333; color: white; padding: 5px; text-align: center;">Application</div> <ul style="list-style-type: none"> ★ UTM,SPM,Bin/Hopper/Hanging Scale/Weighfeeder/Overhead Truck scale/crane scale Concrete Batching Machinery / Tensile Testing machine/Compressive Testing/paramedical/GYM Equipment/Dynamic Weighing/ Textile Machinery/ Automobile testing machine.
Protection Class	IP 67	
Material of Construction	High Nickel Alloy Steel	

Sensotech

2/675, " THE PALMS", 1st Cross Street, Ranga Reddy Garden, Neelankarai, Chennai-600 041

Tel : +91- 44 -2449 4305 / 91763 70667 / 73057 16667

Mail : sales@sensotechindia@gmail.com / sensotechindia@gmail.com

Website : www.sensomaticloadcell.net / www.sensomaticloadcell.com