


MODEL : CRN-L



Dimension

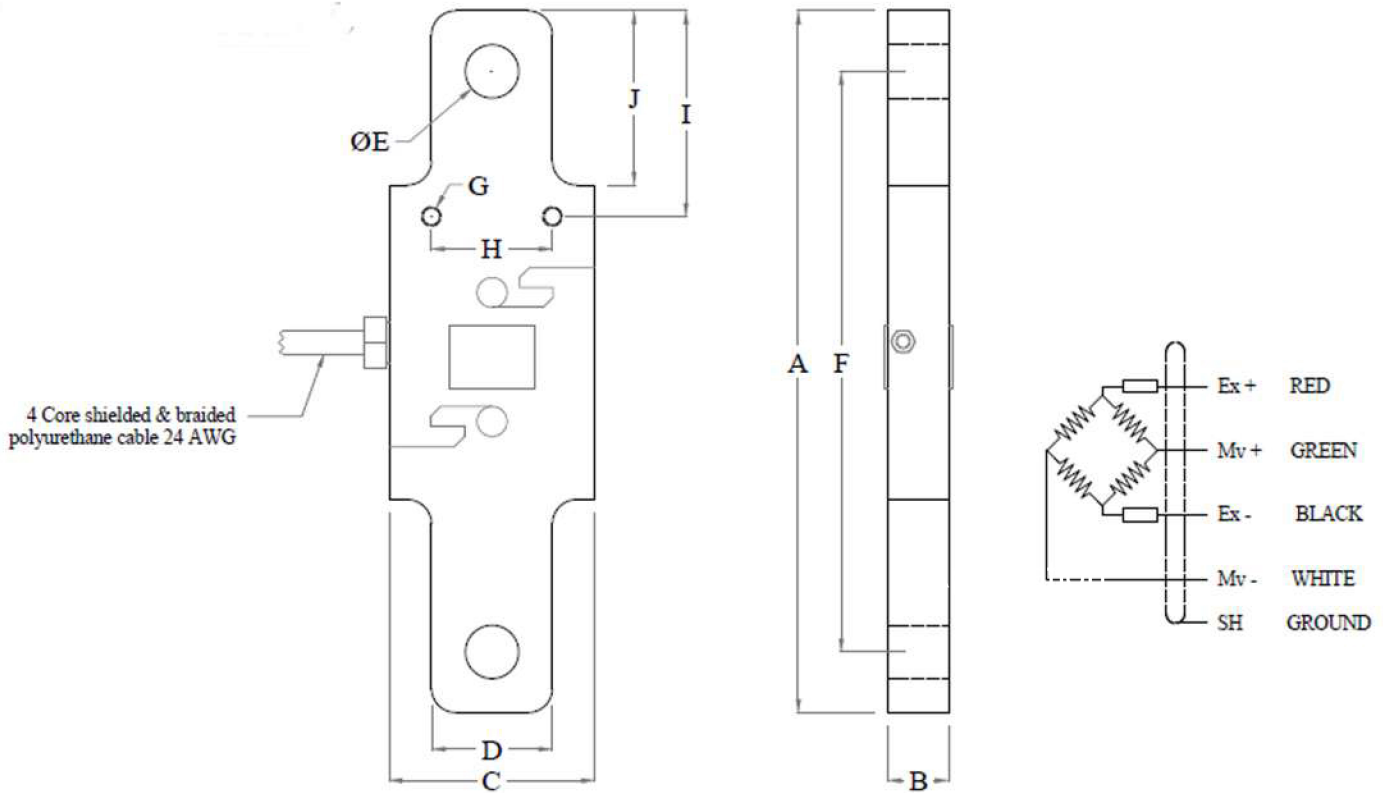

Cap. Tf	A	B	C	D	E	F	G	H	I	J
7.5/10/15	340	37	120	88	36	295	M8x1.25	90	118	100
20/25/30	400	70	120	95	50	296	M8X1.25	90	118	100

All Dimensions are in mm.

MODEL : CRN-L

Performance Data

Capacity Range (in Kg)	
Capacity Range (in tf)	7.5/ 10 /15 /20 /25 /30
Nominal Sensitivity (mv/V)	1±0.25%
Zero Signal Tolerance	0 ± 2%
Input Resistance	350±5 Ω
Output Resistance	350±5 Ω
Recommended Excitation Voltage	12 VDC
Maximum Excitation Voltage	18 VDC
Linearity Deviation (as % of Full Scale)	< ± 0.020
Repeatability (as % of Full Scale)	< ± 0.020
Hysteresis (as % of Full Scale)	< ± 0.020
Creep (as % of Full Scale) in 30 min	< ± 0.020
Effect of Temperature on Zero (% / °C)	± 0.002
Effect of Temperature on Span (% / °C of Load)	± 0.001
Compensated Temperature Range	-10 to + 40°C
Operating Temperature Range	-20 to +70°C
Combined Error (as % Full Scale)	< ± 0.03 max
Isolation Resistance (@ 50 VDC)	> 1000 M Ω
Max. Limit Force (as % of Full Scale)	150
Breaking Force (as % of Full Scale)	300
Lateral Load Limit (as % of Full Scale)	
Protection Class	IP 68
Material of Construction	High Nickel Alloy Steel

Features

- ★ Low Deflection & Creep
- ★ Allows High permissible Dynamic Loading
- ★ Built-in Mechanical Overload Protection
- ★ High Fatigue Rated & Impact Resistant

Application

- ★ Crane Scale
- ★ Ladle Weighing / Eot & Gantry Crane
- ★ Tension Measurement / Tower Testing
- ★ Marine application

Sensotech

2/675, " THE PALMS", 1st Cross Street, Ranga Reddy Garden, Neelankarai, Chennai-600115

(+91) - 9176070667 / 9790922667 / 9952020667 / 9566022667

Mail : sales@sensotechindia@gmail.com / sensotechindia@gmail.com

Website : <https://sensomatic.co> / <https://sensomaticloadcell.net>